## 1.28" (Color) Front Light Panel

12378-xx | Product Data Sheet | 2020




#### **Overview**


The FLEx Front Light Panel optical film is designed to laminate to the front surface of JDI reflective display (LPM013M126C) to provide high quality on-demand display lighting. This thin plastic panel incorporates only a single LED which enables product designers to develop ultra-thin devices and minimize battery use.


- One **low-power** LED (included in Front Light)
- Over 80x less power compared to traditional backlighting
- 0.05 mm thick FLEx film is over **5x thinner** than alternative lightguides
- Simple I/F and Connectivity to System Board


For more information: WEB flexlighting.com CONTACT flexlighting.com/contact PHONE **773-295-0305** 

#### Mechanical

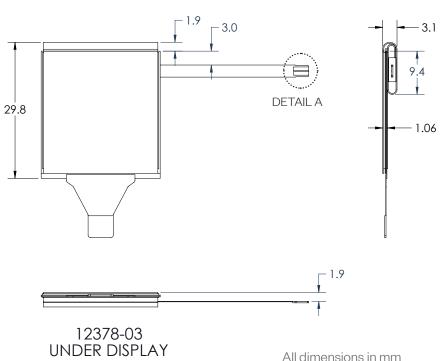








Flexible film allows for different placement options

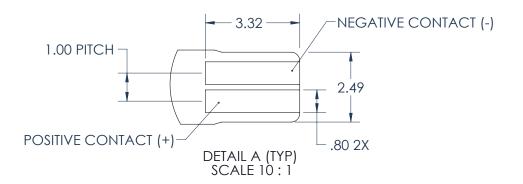




## 1.28" (Color) Front Light Panel


12378-xx | Product Data Sheet | 2020



#### **Electrical**

Item	Symbol	Typical	Absolute Max	Unit
Forward Current	I <sub>F</sub>	5	25	mA
Pulse Forward Current	I <sub>EP</sub>		80	mA
Reverse Voltage	V <sub>R</sub>		5	V





# For more information: WEB flexlighting.com CONTACT flexlighting.com/contact PHONE 773-295-0305

#### **Example ZIF Connectors:**

- Molex 503480-0400
- Molex 52745-0497
- Molex 54550-0471
- Molex 54548-0471 (bottom)
- Molex 505110-0492


### **Optical**

1.28" JDI + Front Light (12378-xx)								
Item		Symbol	TYP.	Unit	Remark			
Viewing Angle CR >2	V	Θ 11 Θ 12	60 30	° (Degree)	[Remark 1]			
	Н	Θ 21 Θ 22	65 65	° (Degree)				
Contrast Ratio	Front light ON	CR	14		[Remark 2]			



Service of the servic

Remark 1: Viewing Angle



Remark 2: Definition of Contrast Ratio

Contrast Ratio (CR) = Reflection intensity in white display
Reflection intensity in black display

Measurements taken with a Minolta Chroma Meter CS-100 at a 17" view distance